

ARROW SELECTION

COMPOUND BOW – Release Aid Calculated Peak Bow Weight–lbs

YOUR ARROW

LENGTH FOR TARGET • FIELD • 3D

RECURVE BOW

Bow Rating - up to 275 FPS	Bow Rating - 276–300 FPS	Bow Rating - 301–320 FPS	Bow Rating - 321–340 FPS	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	Bow Weight—lbs. - Finger Release
29–35 lbs. (13.2–15.9 kg)				00	01	02	03	T1	T2	T3				21–27 lbs. (9.5–12.2 kg)
35–40 lbs. (15.9–18.1 kg)	29–35 lbs. (13.2–15.9 kg)			01	02	03	T1	T2	T3	T4	T5			27–32lbs. (12.2–14.5 kg)
40–45 lbs. (18.1–20.4 kg)	35–40 lbs. (15.9–18.1 kg)	29–35 lbs. (13.2–15.9 kg)		02	03	T1	T2	T3	T4	T5	T6	T7		32–36 lbs. (14.5–16.3 kg)
45–50 lbs. (20.4–22.7 kg)	40–45 lbs (18.1–20.4 kg)	35–40 lbs. (15.9–18.1 kg)		03	T1	T2	T3	T4	T5	T6	T7	T8	T9	36–40 lbs. (16.3–18.1 kg)
50–55 lbs. (22.7–24.9 kg)	45–50 lbs. (20.4–22.7 kg)	40–45 lbs. (18.1–20.4 kg)	35–40 lbs. (15.9–18.1 kg)	T1	T2	T3	T4	T5	T6	T7	T8	T9	T10	40–44 lbs (18.1–20.0 kg)
55–60 lbs (24.9–27.2 kg)	50–55 lbs. (22.7–24.9 kg)	45–50 lbs. (20.4–22.7 kg)	40–45 lbs. (18.1–20.4 kg)	T2	T3	T4	T5	T6	T7	T8	T9	T10	T11	44–48 lbs. (20.0–21.8 kg)
60–65 lbs. (27.2–29.5 kg)	55–60 lbs. (24.9–27.2 kg)	50–55 lbs. (22.7–24.9 kg)	45–50 lbs. (20.4–22.7 kg)	T3	T4	T5	T6	T7	T8	T9	T10	T11	T12	48–52 lbs (21.8–23.6 kg)
65–70 lbs (29.5–31.8 kg)	60–65 lbs. (27.2–29.5 kg)	55–60 lbs. (24.9–27.2 kg)	50–55 lbs. (22.7–24.9 kg)	T4	T5	T6	T7	T8	T9	T10	T11	T12	T13	53–57 lbs (24.0–25.9 kg)
70–76 lbs. (31.8–34.5 kg)	65–70 lbs. (29.5–31.8 kg)	60–65 lbs. (27.2–29.5 kg)	55–60 lbs. (24.9–27.2 kg)	T5	T6	T7	T8	T9	T10	T11	T12	T13	T13	58–62 lbs. (26.3–28.1 kg)
76–82 lbs (34.5–37.2 kg)	70–76 lbs. (31.8–34.5 kg)	65–70 lbs. (29.5–31.8 kg)	60–65 lbs. (27.2–29.5 kg)	T6	T7	T8	T9	T10	T11	T12	T13	T13	T14	63–67 lbs. (28.6–30.4 kg)
82–88 lbs. (37.2–39.9 kg)	76–82 lbs (34.5–37.2 kg)	70–76 lbs. (31.8–34.5 kg)	65–70 lbs. (29.5–31.8 kg)	T7	T8	T9	T10	T11	T12	T13	T13	T14		68–73 lbs. (30.8–33.1 kg)

For ATA Speed of 341–350 FPS: Start in 321–340 FPS column, drop down one row in chart

Examples:

58lb–31in–345 FPS: drops down one row, still in Group T13

46lb–28in–345 FPS: drops down one row, shift from Group T8 to Group T9

For ATA Speed of 351+ FPS: Start in 321–340 FPS column, drop down two rows in chart:

Examples

59lb–31in–355 FPS: drops down two rows, shift from Group T13 to Group T14

47lb–28in–355 FPS: drops down two rows, shift from Group T8 to Group T10

Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch
Group 00				Group 01				Group 02				Group 03			
1800	1.800	Carb1	3.6	2-00	1.500	A/C/G	4.7	1250	1.250	A/C/E	5.1	1100	1.100	A/C/E	5.1
1800	1.800	Apollo	3.6	1500	1.500	A/C/G	4.7	1300	1.300	A/C/G	5.1	1150	1.150	A/C/G	5.5
1800	1.800	Inspire	3.6	1600	1.600	Carb1	3.8	3L-00	1.300	A/C/C	5.1	3-00	1.150	A/C/C	5.5
1214	2.501	75	5.9	1600	1.600	Apollo	3.8	1400	1.400	Carb1	4.2	1150	1.150	Carb1	5.0
1413	2.036	75	5.9	1600	1.600	Inspire	3.8	1400	1.400	Apollo	4.2	1200	1.200	Inspire	7.2
				1416	1.684	75	7.1	1400	1.400	Inspire	4.2	1200	1.200	Apollo	5.5
				1516	1.403	75	7.3	1400	1.400	Vector	3.9	1000	1.000	Vector	5.0
								1514	1.379	X7	6.8	1614	1.153	X7	7.7

Size	Spine	Model	Weight Grs/inch	Size	Spine	Model	Weight Grs/inch
Group T1				Group T2			
*920-1000R	0.920-1.000	A/C/E	5.8	*780-850R	0.780-0.850	A/C/E	6.0
*900-1000R	0.900-1.000	X10	5.8	*750-830R	0.750-0.830	X10	6.4
*880-1000R	0.880-1.000	A/C/G	5.9	770	0.770	ProTour	6.0
2L-04	1.020	A/C/C	6.1	*810-880R	0.810-0.880	A/C/G	6.1
2-04	0.920	A/C/C	6.5	2-04	0.920	A/C/C	6.5
900	0.900	Carb1	5.3	810	0.810	Carb1	5.8
1070	1.070	Apollo	5.9	950	0.950	Apollo	6.2
1000	1.000	Inspire	7.2	900	0.900	Inspire	7.7
1000	1.000	Vector	5.0	1714	0.963	X7	8.1
1713	1.044	75	7.4	1716	0.880	75	9.0
1714	0.963	X7	8.1				
1616	1.079	75	8.4				

Group 17				Group 18			
*520-570R	0.520-0.570	A/C/E	6.7	*470-520R	0.470-0.520	A/C/E	6.8
*500-550R	0.500-0.550	X10	7.8	*450-500R	0.450-0.500	X10	8.1
520	0.520	ProTour	7.3	470	0.470	ProTour	7.6
*540-610R	0.540-0.610	A/C/G	7.7	*480-540R	0.480-0.540	A/C/G	8.4
3-18	0.560	A/C/C	7.8	3-28	0.500	A/C/C	8.1
3-28	0.500	A/C/C	8.1	3-39	0.440	A/C/C	8.6
530	0.530	FMJMatch	8.4	490	0.490	FMJMatch	8.9
550	0.550	Carb1	6.9	500	0.500	Carb1	7.4
560	0.560	Apollo	8.4	2212	0.505	X7	8.8
2212	0.505	X7	8.8	2213	0.460	X7, 75	9.9
2114	0.510	X7, 75	9.9	2114	0.510	X7, 75	9.9
2016	0.531	75	10.6	475	0.475	SDRIVE 23	6.4
475	0.475	SDRIVE 23	6.4	500	0.500	HSPEED	6.9
500	0.500	HSPEED	6.9	470	0.470	PRO	7.3
520	0.520	PRO	7.0	RX7-23	.0420	RX7	10.4
RX7-22	0.475	RX7	9.7	480	.480	SDRIVE 19	7.0
480	0.480	SDRIVE 19	7.0				

Group T9				Group T10				Group T11				Group T12			
*430-470R	0.430-0.470	A/C/E	7.0	*400-430R	0.400-0.430	A/C/E	7.5	*370-400R	0.370-0.400	A/C/E	7.9	370R	0.370	A/C/E	7.9
*410-450R	0.410-0.450	X10	8.5	*380-410R	0.380-0.410	X10	8.9	380R	0.380	X10	8.9	350R	0.350	X10	8.4
420	0.420	ProTour	8.0	380	0.380	ProTour	8.4	380	0.380	ProTour	8.4	340	0.340	ProTour	8.8
*430-480R	0.430-0.480	A/C/G	8.9	*430-480R	0.430-0.480	A/C/G	8.9	3-49	0.390	A/C/C	8.8	3-60	0.340	A/C/C	9.5
3-39	0.440	A/C/C	8.6	3-39	0.440	A/C/C	8.6	3-60	0.340	A/C/C	9.5	3-71	0.300	A/C/C	9.9
450	0.450	FMJMatch	9.4	3-49	0.390	A/C/C	8.8	375	0.375	FMJMatch	10.3	290	0.290	SDRIVE 25	7.8
450	0.450	Carb1	8.1	400	0.400	FMJMatch	10.0	290	0.290	SDRIVE 25	7.8	350	0.350	X7	8.4
2311	0.450	X7	8.9	410	0.410	Carb1	8.5	2413	0.365	X7, 75	10.5	2511	0.348	X7	9.6
2312	0.423	X7	9.5	2413	0.365	X7, 75	10.5	2314	0.390	X7, 75	10.8	2512	0.321	X7	10.3
2213	0.460	X7, 75	9.9	2214	0.425	X7	10.4	2315	0.340	X7, 75	11.8	2612	0.285	X7	10.7
2214	0.425	X7	10.4	2314	0.390	X7, 75	10.8	2511	0.348	X7	9.6	2613	0.265	X7	11.5
2115	0.461	75	10.8	2412	0.400	X7	9.7	375	0.375	SDRIVE 23	6.9	2712	0.260	X7	11.3
375	0.375	SDRIVE 23	6.9	375	0.375	SDRIVE 23	6.9	400	0.400	HSPEED	7.4	325	0.325	SDRIVE 23	7.4
400	0.400	HSPEED	7.4	400	0.400	HSPEED	7.4	380	0.380	PRO	8.9	340	0.340	HSPEED	8.2
420	0.420	PRO	7.8	380	0.380	PRO	8.9	380	0.380	SDRIVE 19	7.8	340	0.340	PRO	8.9
RX7-23	0.420	RX7	10.4	RX7-23	0.420	RX7	10.4					300	0.300	PRO	9.6
380	0.380	SDRIVE 19	7.8	380	0.380	SDRIVE 19	7.8					330	0.330	SDRIVE 19	8.4

KEY

* When two sizes are listed together, the weight listed is for the first shaft

A/C/C Aluminum/Carbon/Composite

A/C/E Aluminum/Carbon/Extreme

A/C/G A/C/G (Aluminum/Carbon)

Apollo Apollo

Carb1 Carbon One

FMJMatch FMJ Match

HSpeed Hyperspeed

Inspire Inspire

Pro	ProComp
1. Cost	1. Cost
2. Speed	2. Speed
3. Accuracy	3. Accuracy
4. Flexibility	4. Flexibility
5. Scalability	5. Scalability
6. Integration	6. Integration
7. Security	7. Security
8. Support	8. Support
9. Customization	9. Customization
10. Reporting	10. Reporting

ProTour X10 ProTour Shafts (Aluminum/Carbon)

SDRIVE 27 Super Drive 27

SDRIVE 25 Super Drive 25

SDRIVE 23 Super Drive 23

SDRIVE 19 Super Drive 19

X7 X7 Eclipse (7178-T9 alloy)

X10 X10 Shafts (Aluminum/Carbon)

75 XX75: Platinum Plus, Tribute, Jazz and Neos (7075 alloy)**RX7** RX7 Tapered (7178-T9 alloy)

R The size recommendations for recurve bows are indicated with a letter “R” next to the size.


Size Indicates suggested arrow size

Spine Spine of arrow size shown (static) ATA standard

Model	Designates arrow model
--------------	------------------------

Weight Listed in grains per inch average for barrelled or tapered shafts

BEGINNER ARCHERY

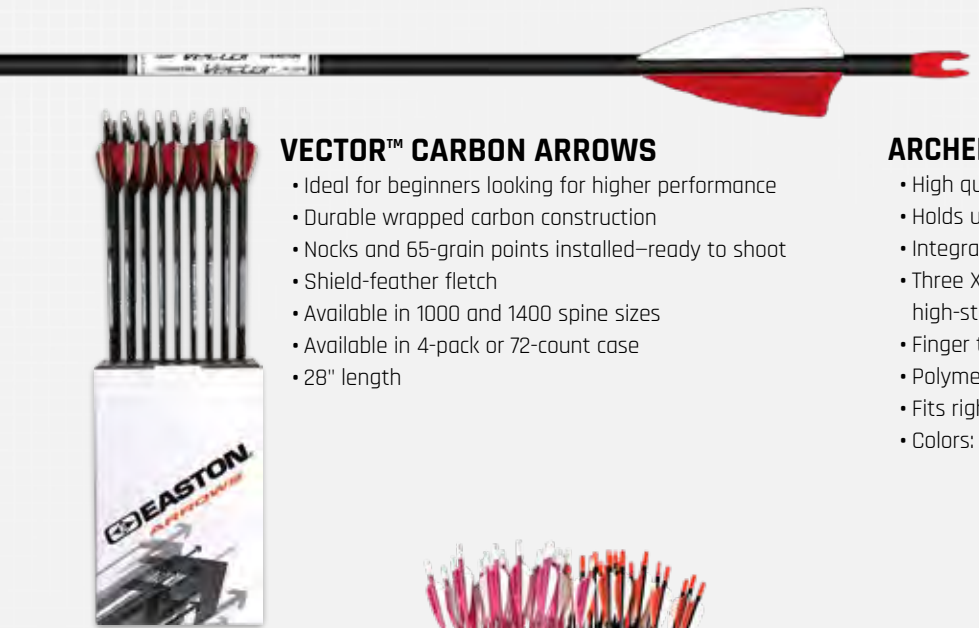

VECTOR™ CARBON ARROWS

- Ideal for beginners looking for higher performance
- Durable wrapped carbon construction
- Nocks and 65-grain points installed–ready to shoot
- Shield-feather fletch
- Available in 1000 and 1400 spine sizes
- Available in 4-pack or 72-count case
- 28" length

ARCHERY COMBO PACK

- High quality 600D fabric hip quiver
- Holds up to 12 arrows
- Integrated belt clip
- Three XX75® size 1816 high-strength 28" arrows
- Finger tab
- Polymer arm guard
- Fits right or left-handed archers
- Colors: black and pink



XX75™

- 7075 aerospace alloy
- Guaranteed straightness: ±.005
- Weight tolerance: ±2.5%
- Strength (psi): 90,000
- Size 1816
- Uses one-piece point and conventional nock
- Pre-cut to 28" with point installed



SCOUT 2™

- Durable fiberglass construction
- Over nock – installed
- Sleeve point – installed
- 26" or 28"



BEGINNER BOW

- The Easton beginner bow is the perfect set up to get you started shooting archery. Smooth shooting polymer platform and easy-to-handle draw length-to-draw-weight ratio, the 52" bow is ideal for beginners seeking correct form development and accuracy.
- Ambidextrous for right or left-handed archers
 - Integrated sight channel
 - Custom Dacron string
 - Ambidextrous arrow rest and sight pin included
 - High-strength glass/polymer limbs and advanced polymer riser
 - Ideal beginner draw weight range 10-20 pounds
 - Max 26" draw
 - Made in USA
 - Includes: bow, quiver, three arrows, sight, finger protector, and armguard




BEGINNER FINGER TAB

- For right handed archers



Kit colors: black, pink, and Realtree Xtra®



Realtree and Realtree Xtra are registered trademarks of Jordan Outdoor Enterprises, Ltd.

USING THE TARGET ARROW SELECTION CHART


- Once you have determined your Correct Target Arrow Length and Calculated or Actual Peak Bow Weight, you are ready to select your correct shaft size:
 - 1.A** Compound bows. In the "Calculated Peak Bow Weight" column (left-hand side of the chart), select the column with the type of cam on your bow. Locate your Calculated Peak Bow Weight in that column.
 - 1.B** Recurve bows and Modern Longbows. In the "Recurve Bow Weight" column (right-hand side of the chart), select the column with the bow type. Next, locate your Actual Peak Bow Weight in that column.
- Move across that bow-weight row horizontally to the column indicating your Correct Arrow Length. Note the letter in the box where your Calculated or Actual Peak Bow Weight row and Correct Target Arrow Length column intersect. The "Shaft Size" box below the chart with the same letter contains your recommended shaft sizes. Select a shaft from the chart depending on the shaft material, shaft weight, and type of shooting you will be doing.

SELECTING THE CORRECT TARGET SHAFT SIZE


Our Target Shaft Selection Chart will help you find the perfect shaft match for your bow–quickly & easily. Advanced, interactive Spine Weight Comparison and Target Shaft Selection Charts are now available online at eastonarchery.com

1. Determining Correct Target Arrow Length

The Correct Arrow Length for bows (including bows with overdraws) is determined by drawing an extra-long arrow to full draw and having someone mark the arrow one inch in front of where the arrow contacts the most forward portion of the arrow rest.

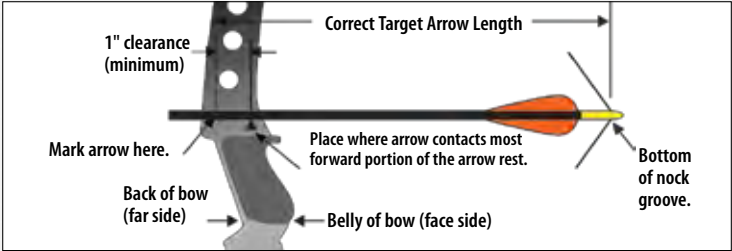

Bow Draw Length. Draw length is measured at full draw from the bottom of the nock groove to the back (far side) of the bow. Actual arrow length and draw length are only the same if the end of the arrow shaft is even with the back of the bow (far side) at full draw.

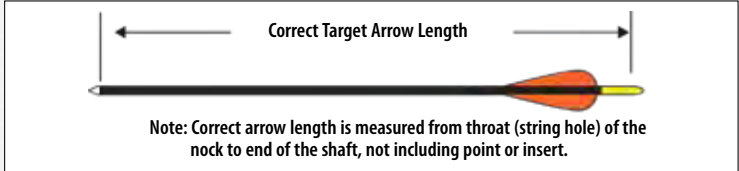

2. Determining Actual Peak Bow Weight Compound Bows

Compound bows must be measured at the peak bow weight as the bow is being drawn and not while letting the bow down. The suggested shaft sizes in the charts were determined using a "Standard" Setup which includes:

- Use of a release aid
- Compound bow with brace height greater than 60"

If your setup differs from the "Standard" Setup, use the Variables (following) to make adjustments to determine the Calculated Peak Bow Weight so the correct arrow size can be selected on the chart.

Variables to the "Standard" Setup for Compound Bows

- Point weight over 100 gr.-Add 3 lbs. for each 25 gr. heavier than 100 gr.
- Bows with brace heights less than 60"-Add 5 lbs.
- Finger release-Add 5 lbs.

Overdraw Compound Bows

If you are using an overdraw, make the variable calculations (if any), and then modify the Calculated Peak Bow Weight of your bow using the chart below.

Length of OverDraw 1" 2" 3" 4" 5" For 50#–70# Actual/Calculated Peak Bow Weight, add to bow weight – 1# 3# 6# 9# 12#

DETERMINING ACTUAL PEAK BOW WEIGHT RECURVE AND MODERN LONGBOWS

Your local archery pro shop is the best place to determine the actual draw weight of your bow. Actual Peak Bow Weight for recurve bows and longbows should be measured at your draw length.

ARROW SELECTION

LOW POUNDAGE RECURVE BOW Bow Weight–lbs. Finger Release	YOUR ARROW LENGTH						
	21"	22"	23"	24"	25"	26"	27"
16–20 lbs. (7.3–9.1 kg)		Y1	Y1	Y2	Y3	Y4	
20–24 lbs. (9.1–10.9 kg)		Y1	Y1	Y2	Y3	Y4	Y5
24–28 lbs. (10.9–12.7 kg)	Y1	Y1	Y2	Y3	Y4	Y5	Y6
28–32 lbs. (12.7–14.5 kg)	Y1	Y2	Y3	Y4	Y5	Y6	Y7
32–36 lbs. (14.5–16.3 kg)	Y2	Y3	Y4	Y5	Y6	Y7	
36–40 lbs. (16.3–18.1 kg)	Y3	Y4	Y5	Y6	Y7		
<i>Note: If your arrow shaft is longer than inch length shown, round-up to the next longer increment.</i>							

Size	Spine	Model	Weight Grs/Inch	Size	Spine	Model	Weight Grs/Inch
Group Y1				Group Y2			
2000	2.000	Carb1	3.4	1800	1.800	Carb1	3.6
2000	2.000	Apollo	3.4	1800	1.800	Apollo	3.6
2000	2.000	Inspire	3.4	1800	1.800	Inspire	3.6
1214	2.501	75	5.9	1413	2.036	75	5.9

Group Y3				Group Y4			
1600	1.600	Carb1	3.8	15020-	1.500	A/C/G	4.7
1600	1.600	Apollo	3.8	2-00	1.500	A/C/C	4.7
1600	1.600	Inspire	3.8	1400	1.400	Carb1	4.2
1416	1.684	75	7.2	1400	1.400	Apollo	4.2
				1400	1.400	Inspire	3.9
				1400	1.400	Vector	3.9
				1416	1.684	75	7.2

Group Y5				Group Y6			
1250	1.250	A/C/E	5.1	1250	1.250	A/C/E	5.1
1300	1.300	A/C/G	5.1	1150	1.150	A/C/G	5.5
3L-00	1.300	A/C/C	5.1	3L-00	1.150	A/C/C	5.5
1200	1.200	Apollo	5.5	1150	1.200	Carb1	5.0
1200	1.200	Inspire	7.2	1200	1.200	Apollo	5.5
1400	1.400	Vector	3.9	1200	1.200	Inspire	7.2
1514	1.379	X7	6.8	1000	1.000	Vector	5.0
1516	1.403	75	7.3	1516	1.403	75	7.3
				1614	1.403	X7	7.7

Group Y7				KEY	
1000	1.000	A/C/E	5.7	A/C/E	Aluminum/Carbon/Extreme
1100	1.100	A/C/G	5.1	X10	X10 Shafts (Aluminum/Carbon)
1000	1.000	X10	5.3	A/C/G	A/C/G (Aluminum/Carbon)
1000	1.000	A/C/G	5.7	A/C/C	Aluminum/Carbon/Composite
3-00	1.150	A/C/C	5.5	Carb1	Carbon One N-FUSED® Carbon
1000	1.000	Carb1	5.0	Apollo	Carbon Apollo
1070	1.070	Apollo	5.9	Inspire	Carbon Inspire
1000	1.000	Inspire	7.2	Vector	Carbon Vector
1000	1.000	Vector	5.0	X7	X7 Eclipse (7178 alloy)
1614	1.153	X7	7.7	75	XX75: Platinum Plus,Tribute, Jazz and Neos (7075 alloy)
1616	1.079	75	8.4		

Note: To determine weight at your shaft length, multiply the grains-per-inch (gpi) by your actual shaft length not including point, insert, or UNI Bushing.

TARGET SHAFT MODELS

Aluminum/Carbon	Pg #	Materials/Construction		Inserts	Points	Nock System	Nock Type	Weight Tolerance¹	Straightness¹	Color/Finish	Sizes
X10®	2	High-strength carbon fiber bonded to a precision 7075 alloy core tube –barreled shaft		N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 Pin	Pin Nocks X10 Overnock	±0.5 grains	±.0015"	Polished Black Carbon	1000, 900, 830, 750, 700, 650, 600, 550, 500, 450, 410, 380, 350,325
X10® PROTOUR™	2	High-strength carbon fiber bonded to a precision 7075 alloy core tube –single-taper shaft		N/A	X10 Ballistic Tungsten Break-off or X10 Stainless Steel Break-off	X10 or ProTour Pin	Pin Nocks	±0.5 grains	±.0015"	Polished Black Carbon	770, 720, 670, 620, 570, 520, 470, 420, 380, 340
A/C/E®	4	High-strength carbon fiber bonded to a precision 7075 alloy core tube –barreled shaft		A/C/E Insert	Screw-in, One-piece or A/C/E Stainless Steel Break-off	A/C/E Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grains	±.0015"	Polished Black Carbon	(1250, 1100)⁵, 1000, 920, 850, 780, 720, 670, 620, 570, 520, 470, 430, 400, 370
PROCOMP™	4	High-strength carbon fiber bonded to a precision 7075 alloy core tube –parallel shaft		A/C/E Insert	Screw-in, One-piece or A/C/E Stainless Steel Break-off	A/C/E Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grains	±.0015"	Polished Black Carbon	570, 520, 470, 420, 400, 380, 340, 300, 250
A/C/C™	6	High-strength carbon fiber bonded to a precision 7075 alloy core tube		RPS Insert or Half out Insert	One-piece Parabolic, NIBB, or RPS Point	UNI System	G Nock or Pin Nock	±0.5 grains	±.002"	Black, Micro-smooth Finish	2-00, 3L-00, 3-00, 2L-04, 2-04, 3X-04, 3L-04, 3-04, 3L-18, 3-18, 3-28, 3-39, 3-49, 3-60, 3-71
A/C/G™	6	High-strength carbon fiber bonded to a precision 7075 alloy core tube		A/C/E Insert	Screw-in, One-piece, A/C/E or A/C/G Stainless Steel Break-off	A/C/E & A/C/G Pin or Insert Nock	Pin Nocks or G Nock	±0.5 grain	±.002"	Polished Black Carbon	1500, 1300, 1150, 1000, 880, 810, 710, 660, 610, 540, 480, 430
FMJ MATCH™	18	High-strength carbon core bonded to a precision 7075 alloy jacket		A/C/E or D6, Tit. 8/32 Half-Out	Screw-in, One-piece, Carbon One Stainless Steel Break-off	G Nock or G Pin Nock	G Nock	±2 grains	±.001"	Polished Silver finish	530, 490, 450, 400, 375
Carbon	Pg #	Materials/Construction		Inserts	Points	Nock System	Nock Type	Weight Tolerance¹	Straightness¹	Color/Finish	Sizes
CARBON ONE™	8	UltraLite carbon fibers		A/C/E Insert	Carbon One Stainless Steel Break-off	A/C/E Pin, Carbon One Pin, or insert Nock	Pin Nock, Pin G Nock, G Nock	±1 grains	±.003"	Black, Micro-smooth Finish	2000, 1800,1600,1400,1150, 1000, 900, 810, 730, 660, 600, 550, 500, 450, 410
HYPER SPEED™ HYPER SPEED™ PRO	8	UltraLite carbon fibers		CB Insert	CB and RPS	NA	3D Super, Super, or S	±2 grains	±.003" ±.001"	Black, Smooth-matte Finish	500, 400, 340, 300
APOLLO™	10	UltraLite carbon fibers		A/C/E Insert	Apollo One-Piece	A/C/E Pin, Carbon One Pin, or insert Nock	Pin Nock, Pin G Nock, G Nock	±2 grains	±.005"	Black, Micro-smooth Finish	2000, 1800,1600,1400, 1200, 1070, 950, 840, 740, 670, 610, 560
INSPIRE™	10	Small diameter pultruded carbon		NA	Zinc One-piece Point	NA	G Nock or X Nock	NA	NA	Black, Smooth-matte Finish	2000, 1800,1600,1400, 1200, 1000, 900, 750, 630, 570
SUPERDRIVE 19™	12	Multi-layer wrapped Carbon fiber		NA	One-piece	G Nock Uni, or G Pin Nock	G Nock, or Pin Nock	±1 grains	±.002"	Black, Smooth-matte Finish	460, 380, 330
SUPERDRIVE 23™	12	Multi-layer wrapped Carbon fiber		40 gr.	One-piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	±1 grains	±.003"	Black, Smooth-matte Finish	475, 375, 325
SUPERDRIVE 25™	14	Multi-layer wrapped Carbon fiber		50 gr.	One-piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	±1 grains	±.002"	Black, Smooth-matte Finish	290
SUPERDRIVE 27™ SUPERDRIVE 27™ PRO	14	Multi-layer wrapped Carbon fiber		NA	One-piece	Super UNI, G Nock Uni, or G Pin Nock	3D, Super, G Nock, or Pin Nock	NA	±.005" ±.002"	Black, Smooth-matte Finish	270
Aluminum	Pg #	Aerospace Alloy	Strength² (psi)	Inserts	Points	Nock System	Nock Type	Weight Tolerance¹	Straightness¹	Color/Finish	Sizes
RX7™	16	7178-T9	105,000	NA	NIBB or One-piece Bullet	Super UNI System	3D Super, Super Nock or S Nock	±3/4%	+ .001"	Hard-Anodized Silver and Blue	23-420, 22-475, 21-525
X² 3™ X² 7™	16	7178-T9	105,000	RPS Insert	NIBB or One-piece Bullet	Super UNI System	3D Super, Super Nock or S Nock	±3/4%	+ .001"	Hard-Anodized Silver and Black	2712, 2312, 2314, 2315, 2318
ECLIPSE™	18	7178-T9	105,000	Not Available	NIBB or One-piece Bullet	UNI or Super UNI System	3D Super Super Nock S Nock or G Nock	±3/4%	±.001"	Hard-Anodized Polished Black	1514, 1614, 1714, 1814, 1914, 2014, 2114, 2212, 2213, 2214, 2311, 2312, 2314, 2315, 2412, 2413, 2511, 2512, 2612, 2613, 2712
GENESIS™	18	7075	90,000	Not Available	One-piece Point	Full-Diameter	N Nock	±2.5 grains	±.005"	Hard-Anodized Bright Blue, Orange, Black	1820
XX75 PLATINUM® PLUS	20	7075-T9	96,000	RPS Insert	NIBB, One-piece Bullet, or RPS Point	UNI or Super UNI System	3D Super Super Nock or S Nock	±1%	±.002"	Hard-Anodized Platinum Grey	1416, 1516, 1616, 1713, 1716, 1813, 1816, 1913, 1916, 2013, 2016, 2114, 2213, 2315
JAZZ™	20	7075	90,000	RPS Insert 1716 & up	NIBB, One-piece Bullet, or RPS Point	Full-Diameter Taper Swage	Conventional or G Nock⁶	±2%	±.005"	Hard-Anodized Purple/Silver	1214⁴, 1413, 1416, 1516, 1616, 1716, 1816, 1916, 2016
TRIBUTE™	20	7075	90,000	RPS Insert 1716 & up	NIBB, One-Piece Bullet or RPS Point	Full-Diameter Taper Swag	Conventional or G Nock	±2%	±.005"	Hard-Anodized Black	1214⁴, 1413, 1416, 1516 1616, 1716, 1816,1916, 2016
NEOS™	20	7075	90,000	Not Available	One-piece Point	Full-Diameter Taper Swage	Conventional	±5%	±.008"	Hard-Anodized Gold	1618

1 Guaranteed straight to more stringent standards than ATA/ASTM methods.

2 Guaranteed to meet or exceed similar carbon-industry straightness specifications.

3 Tensile strength value may vary ±3%.

4 Grains-per-shafts in a dozen bundle.

5 Special order only.

6 1214 size Jazz uses direct-fit G Nock.

Eclipse and Platinum Plus sizes in italics use UNI System and G Nock.

⁴/⁵/⁶ Registered Trademark of Easton.

LIMITED WARRANTY
The Easton arrow shaft limited warranty covers any defects in material and/or workmanship for one year from the original owner's date of purchase. Arrow shafts that are defective will be replaced by your local Easton dealer with proof of purchase. Damage caused by impact from other arrows, impact with hard objects, improper cleaning or fletching, or from normal wear and tear is not covered by Easton's limited warranty. The limited warranty also does not cover damage resulting from your failure to follow Easton's written instructions. For written instructions and warranty details see www.eastonarchery.com.

ARCHERY EXPERTS
For more information on arrow preparation and assembly, visit: WWW.EASTONARCHERY.COM

ALUMINUM SHAFT COMPONENT SPECIFICATIONS

Size	Shaft Weight		Spine @ 28" Span	Stock Length ³		Conventional Nock Size ⁴	UNI System ⁵		NIBB Point	One-piece Bullet Point	RPS ⁷ Insert Alum.	RPS ⁷ Point Size
	XX75 ¹	X7 ²		XX75 ¹	X7 ²		UNI Bushing ⁶					
	Grains per Inch			Inches			Grains					
			Deflection in Inches	Inches	Inches	Grains	Grains	Grains ⁸	Grains ⁸	Grains ⁸		
1214	5.9	—	2.501	26½	—	—	—	—	45	—	—	
1413	5.9	—	2.036	26	—	7/32	—	—	35	—	—	
1416	7.2	—	1.684	27	—	7/32	2	—	46	52	—	—
1514	—	6.8	1.379	—	26½	—	5	—	61 ⁹	—	—	—
1516	7.3	—	1.403	27½	—	1/4	3	—	48	54	—	—
1614	—	7.7	1.153	—	28	—	5	—	51	—	—	—
1616	8.4	—	1.079	28½	—	1/4	5	—	56	63	—	—
1618	9.8	—	0.957	32½	—	1/4	—	—	50	—	—	—
1713	7.4	—	1.044	29	—	—	7	—	54	—	—	—
1714	—	8.1	0.963	—	29	—	7	—	56	—	—	—
1716	9.0	—	0.880	29	—	1/4	7	—	60	68	10	17/64
1813	7.9	—	0.874	30	—	1/4	8	—	56	—	14	9/32
1814	—	8.6	0.799	—	29½	—	8	—	60	—	—	—
1816	9.3	—	0.756	30	—	9/32	8	—	63	74	12	9/32
1820	12.2	—	0.592	29½	—	9/32	—	—	59	—	—	—
1913	8.3	—	0.733	31	—	9/32	9	—	64	—	18	5/16
1914	—	9.3	0.658	—	30½	—	9	—	64	—	—	—
1916	10.0	—	0.623	31	—	9/32	9	—	72	82	16	5/16
2013	9.0	—	0.610	32	—	—	—	5	68	—	21	5/16
2014	—	9.6	0.579	—	31½	—	(10)	5	71	—	—	—
2016	10.6	—	0.531	32	—	—	—	4	80	90	20	5/16
2114	9.9	9.9	0.510	31	32½	—	(11)	7	78	100	25	5/16
2212	—	8.8	0.505	—	32½	—	(14)	9	102 ⁹	100	31	11/32
2213	9.8	9.9	0.458	31	33½	—	(13)	9	88	100	30	11/32
2214	—	10.4	0.425	—	33	—	(14)	9	103 ⁹	100	—	—
2311	—	8.9	0.450	—	33	—	(15)	11	99 ⁹	100	37	11/32
2312	—	9.5	0.423	—	33	—	(15)	11	99 ⁹	100	37	11/32
2314	10.7	10.8	0.391	32	33½	—	(14)	10	—	100	34	11/32
2315	11.7	11.8	0.342	32	34	—	—	11	—	100	37	11/32
2318	—	13.7	0.300	—	34¼	—	—	11	—	200	—	—
2412	—	9.7	0.400	—	34	—	(17)	12	110	100	40	11/32
2413	—	10.5	0.365	—	34	—	(17)	12	110	100	40	11/32
2511	—	9.6	0.348	—	34	—	(20)	15	108 ⁹	100	52	11/32
2512	—	10.3	0.321	—	34½	—	(20)	15	108 ⁹	100	52	11/32
2612	—	10.7	0.285	—	34½	—	(22)	17	—	150	58	3/8
2613	—	11.5	0.265	—	34½	—	(22)	17	—	150	58	3/8
2712	—	11.3	0.260	—	34½	—	—	19	—	150/300	—	—
— Indicates not available				5 UNI—Universal Nock Installation System.				9 This NIBB point will provide approximately an 8% F.O.C. All other NIBB points are approximately 7% F.O.C. F.O.C. is Front-of-Center balance position on the arrow shaft.				
1 XX75 Tribute, Jazz, Platinum Plus, Genesis.				6 Parentheses indicate smaller G Nock UNI Bushing size is available as an optional accessory.								
2 X7 Eclipse.				7 RPS = Replaceable Point System with 8-32 ATA Standard thread.								
3 Length is approximate stock shaft length for each size.				8 NIBB point grain weights are ±0.5 grain. All other components are ±1 grain.								
4 Nock size for conventional swaged nock taper.								10 Super UNI Bushing accepts Super, S, 3D Super Nock, and Micro Super Nock.				

— Indicates not available

1 XX75 Tribute, Jazz, Platinum Plus, Genesis.

2 X7 Eclipse.

3 Length is approximate stock shaft length for each size.

4 Nock size for conventional swaged nock taper.

5 UNI—Universal Nock Installation System.

6 Parentheses indicate smaller G Nock UNI Bushing size is available as an optional accessory.

7 RPS = Replaceable Point System with 8-32 ATA Standard thread.

8 NIBB point grain weights are ±0.5 grain. All other components are ±1 grain.

9 This NIBB point will provide approximately an 8% F.O.C. All other NIBB points are approximately 7% F.O.C. F.O.C. is Front-of-Center balance position on the arrow shaft.

10 Super UNI Bushing accepts Super, S, 3D Super Nock, and Micro Super Nock.

⚠ WARNING!: FOLLOW THESE INSTRUCTIONS TO AVOID PERSONAL INJURY. SEE WARNINGS AND USE AT WWW.BSAFE.WS OR 877-INFO-ETP (877-463-6387).

BOW INSPECTION
Before shooting any Easton arrow, it is critical to inspect your bow, including all components, to be sure that it is properly adjusted and in good working order. Easton arrows should only be used with bows that have a correct pull weight and draw length (see arrow selection chart at www.eastonarchery.com/shaft-selector/). Selecting the correct arrow and arrow length for the bow is the responsibility of the shooter, and failure to do so could result in personal injury and/or equipment damage.
WARNING! NEVER SHOOT AN ARROW WITH AN IMPROPERLY ADJUSTED OR DAMAGED BOW.

ARROW BREAKAGE
Any arrow can become damaged. A damaged arrow could break upon release and injure you or a bystander. Damage to an arrow shaft, or any of its components, may occur from improper transport, handling, or use; impacts with hard objects or other arrows; or, after being shot into a game animal. No list can cover all possible conditions and situations that may cause damage. Use good judgment and common sense, as well as follow the warnings and instructions below, to determine if your arrow has been damaged in any way.
WARNING! NEVER SHOOT A DAMAGED ARROW.

ARROW USE PRECAUTIONS
Before each shot (including the first shot of a new arrow) carefully inspect each arrow shaft and all arrow components to see that they have not been damaged. Before shooting, place the arrow between your thumb and fingers, and using your other hand to slowly rotate the shaft, run your fingertips along the entire arrow length, feeling and looking closely for nicks, cracks, splits, dents, or other marks that could indicate the shaft has been damaged (see arrow inspection video at www.eastonarchery.com/warning-use/). If your arrow is crested, inspect for damage on the crest surface and for any soft spots under the crest wrap. You may need to remove the cresting to make a thorough inspection. If damage is present, DISCARD THE ARROW.
WARNING! NEVER SHOOT A DAMAGED ARROW.

Before each shot, inspect the nock for damage and check that it is fully seated, and fits tightly in the shaft. Apply twisting pressure to see if the nock turns easily. If the nock has backed out of the arrow or turns easily, inspect for cracks in the arrow shaft. If there are cracks in the arrow shaft, or if the nock is loose, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.** If the nock is damaged, REPLACE THE NOCK.
WARNING! NEVER SHOOT AN ARROW WITH A DAMAGED NOCK.

⚠ WARNING: Cancer and Reproductive Harm—www.P65Warnings.ca.gov
Some of the products listed in this Product Guide may be subject to California Proposition 65 warnings requirements. See product packaging or website for specific warning information. This Product Guide is intended for informational purposes only, not a solicitation for product sales.

ADDITIONAL TESTS FOR CARBON ARROWS
When checking carbon arrows, perform the following additional tests:

1. Grasp the shaft just above the point and below the nock, then flex the arrow in an arc (bending it away from you and others) with a deflection of 1 to 2 inches (2.5 to 5 cm), and feel and listen for cracking (*Figure 1*). Perform this test 4 to 6 times, rotating the arrow slightly between each flex until you have gone around the entire arrow. If you hear or feel cracking, the carbon has been damaged, DISCARD THE ARROW.
WARNING! NEVER SHOOT A DAMAGED ARROW.



2. While still holding the point and fletching ends of the arrow, twist the shaft in opposite directions (*Figure 2*). If the arrow “relaxes” or twists easily, the carbon has been damaged. DISCARD THE ARROW.
WARNING! NEVER SHOOT A DAMAGED ARROW.



A damaged arrow could break upon release and injure you or a bystander. If you have any reason to believe that an arrow has been damaged, DISCARD THE ARROW.
WARNING! NEVER SHOOT A DAMAGED ARROW.

CARBON ARROW CUTTING
Only cut a carbon arrow using a high-speed arrow cut-off saw. Using any other saw or cutting device may cause damage to the arrow. If an arrow has been cut without using a high-speed arrow cut-off saw, DISCARD THE ARROW. **WARNING! NEVER SHOOT A DAMAGED ARROW.**

To reduce your risk of serious injury or death, you must read and understand all safety warnings and instructions. If you do not understand these instructions, or cannot adequately perform the above tests, STOP and seek appropriate assistance before shooting any arrow.

COMPOUND BOW - RELEASE AID PEAK BOW WEIGHT (LBS)				CORRECT ARROW LENGTH FOR TARGET - FIELD - 3D (INCH)													
COMPOUND Bow <276 FPS	COMPOUND Bow 276-300 FPS	COMPOUND Bow 301 - 340 FPS	COMPOUND Bow 340 - 360 FPS	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	RECURVE Bow			
				Y1	Y1	Y2	Y3	Y4							16-19#		
29-35#				Y1	Y2	Y3	Y4	A1	A2	A3	A4				20-23#		
35-40#	29-35#			Y2	Y3	Y4	A1	A2	A3	A4	A5	A6			24-29#		
40-45#	35-40#	29-35#					A1	A2	A3	A4	A5	A6	A7			30-35#	
45-50#	40-45#	35-40#	29-35#			A1	A2	A3	A4	A5	A6	A7	A8	A9			36-40#
50-55#	45-50#	40-45#	35-40#	A1	A2	A3	A4	A5	A6	A7	A8	A9	A10			41-45#	
55-60#	50-55#	45-50#	40-45#	A2	A3	A4	A5	A6	A7	A8	A9	A10	A11			46-50#	
60-65#	55-60#	50-55#	45-50#	A3	A4	A5	A6	A7	A8	A9	A10	A11	A12			51-55#	
65-70#	60-65#	55-60#	50-55#	A4	A5	A6	A7	A8	A9	A10	A11	A12	A13			56-60#	
70-76#	65-70#	60-65#	55-60#	A5	A6	A7	A8	A9	A10	A11	A12	A13				61-65#	
76-82#	70-76#	65-70#	60-65#	A6	A7	A8	A9	A10	A11	A12	A13					66-70#	

LOW POUNDAGE RECURVE BOW	
GROUP Y1	
R 2000	RADIUS
GROUP Y2	
R 1800	RADIUS
GROUP Y3	
R 1500	RADIUS
GROUP Y4	
R 1100	BRIXXON
C 1100	BRIXXON
R 1000	PARAGON
R 1000	PERFORMA
R 1000	PRECIUM
R 1300	RADIUS
R 1100	RADIUS

GROUP A1	
R 1000	BRIXXON
C 900	BRIXXON
R 1000-900	PER/PRE/PAR
C 900	PER/PRE/PAR
R 1000-900	RADIUS
C 900	RADIUS

GROUP A6	
R 600-550	BRIXXON
C 600-550	BRIXXON
700-600	EDGE
500	EMPROS
R 600-550	PER/PRE/PAR
C 600-550	PER/PRE/PAR
R 600-550	RADIUS
C 550	RADIUS

GROUP A11	
350-300	BRUXX
350	EDGE
350-300	EMPROS
350	MAVERICK
R 400	PER/PRE/PAR
C 400	PER/PRE/PAR

GROUP A2	
R 900-850	BRIXXON
C 800	BRIXXON
R 900-850	PER/PRE/PAR
C 800	PER/PRE/PAR
R 850-800	RADIUS
C 800	RADIUS

GROUP A7	
R 550-500	BRIXXON
C 500	BRIXXON
500	EDGE
500-400	EMPROS
500	MAVERICK
R 550-500	PER/PRE/PAR
C 500	PER/PRE/PAR
R 550-500	RADIUS
C 500	RADIUS

GROUP A12	
300	BRUXX
350-300	EDGE
300	EMPROS
350-300	MAVERICK
C 350	PER/PRE/PAR

GROUP A3	
R 850-800	BRIXXON
C 750	BRIXXON
800	EDGE
R 850-800	PER/PRE/PAR
C 750	PER/PRE/PAR
R 750-700	RADIUS
C 700	RADIUS

GROUP A8	
R 500	BRIXXON
C 450	BRIXXON
500-400	EDGE
400	EMPROS
500-400	MAVERICK
R 500	PER/PRE/PAR
C 450	PER/PRE/PAR
R 500-450	RADIUS
C 450	RADIUS

GROUP A13	
300	BRUXX
300	EDGE
300	EMPROS
300	MAVERICK

GROUP A4	
R 750-700	BRIXXON
C 650	BRIXXON
800-700	EDGE
R 750-700	PER/PRE/PAR
C 650	PER/PRE/PAR
R 700-650	RADIUS
C 650	RADIUS

GROUP A9	
R 450	BRIXXON
C 400	BRIXXON
400	EDGE
400-350	EMPROS
400	MAVERICK
R 450	PER/PRE/PAR
C 400	PER/PRE/PAR
R 450-400	RADIUS
C 400	RADIUS

GROUP A5	
R 700-650	BRIXXON
C 600	BRIXXON
700	EDGE
R 700-650	PER/PRE/PAR
C 600	PER/PRE/PAR
R 650-600	RADIUS
C 600	RADIUS

GROUP A10	
R 400	BRIXXON
C 400	BRIXXON
400-350	EDGE
350	EMPROS
400-350	MAVERICK
R 400	PER/PRE/PAR
C 400	PER/PRE/PAR
R 400	RADIUS
C 400	RADIUS

LEGENDS:
R: RECURVE
C: COMPOUND
ARROW LENGTH MEASURED
FROM CUT TO CUT

SKYLON



ARCHERY

/// • WARNING • ///

CHECK YOUR ARROWS BEFORE USE

MORE INFORMATION AT


arrowuse
WWW.ARROWUSE.COM



Adjustment to the Chart

a) Front weight different than standard setting – If lighter by 20 (40) grains move your correct peak draw weight box 1 (2) row up. If heavier by 20 grains move 1 row down.

b) Compound bows different than Soft Cam – For Hard Cam Bows move your peak draw weight box 1 row down. For Round Wheel Bows move your peak draw weight box 1 row up.

c) Finger Release – move your correct spined shaft box 1 row down.

A RECURVE BOWS Finger Release	Correct Spine Selection UF: ULTRA FAST • SC: SUPER CLUB										B COMPOUND BOWS Soft Cam
	C Arrow length from nock groove to end of shaft										
	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	
23 TO 26	UF 1200 SC 1020	UF 1200 SC 1020	UF 1200 SC 1020	UF 950 SC 1525	UF 820 SC 1525	UF 820 SC 2030	UF 710 SC 2030	UF 710 SC 2030	UF 620 SC 3040	UF 550 SC 3040	34 TO 40
26 TO 29	UF 1200 SC 1020	UF 1200 SC 1020	UF 1200 SC 1020	UF 950 SC 1525	UF 820 SC 1525	UF 820 SC 2030	UF 710 SC 2030	UF 710 SC 3040	UF 620 SC 3040	UF 550 SC 3040	40 TO 43
29 TO 32	UF 1200 SC 1020	UF 1200 SC 1020	UF 950 SC 1525	UF 820 SC 1525	UF 820 SC 2030	UF 710 SC 2030	UF 710 SC 2030	UF 620 SC 3040	UF 550 SC 3040	UF 550 SC 3040	43 TO 46
32 TO 35	UF 1200 SC 1020	UF 1200 SC 1020	UF 950 SC 1525	UF 820 SC 1525	UF 820 SC 2030	UF 710 SC 2030	UF 710 SC 3040	UF 620 SC 3040	UF 550 SC 3040	UF 500 SC 4050	46 TO 49
35 TO 38	UF 1200 SC 1020	UF 950 SC 1020	UF 820 SC 1525	UF 710 SC 2030	UF 710 SC 2030	UF 620 SC 2030	UF 620 SC 3040	UF 550 SC 3040	UF 500 SC 4050	UF 450 SC 4050	49 TO 52
38 TO 41	UF 1200 SC 1020	UF 950 SC 1525	UF 820 SC 1525	UF 710 SC 2030	UF 710 SC 2030	UF 620 SC 3040	UF 620 SC 3040	UF 550 SC 4050	UF 500 SC 4050	UF 450 SC 4050	52 TO 55
41 TO 44	UF 950 SC 1020	UF 820 SC 1525	UF 710 SC 2030	UF 710 SC 2030	UF 620 SC 2030	UF 620 SC 3040	UF 550 SC 3040	UF 500 SC 4050	UF 450 SC 4050	UF 400 SC 4050	55 TO 58
44 TO 48	UF 820 SC 1525	UF 710 SC 2030	UF 710 SC 2030	UF 620 SC 2030	UF 620 SC 3040	UF 550 SC 3040	UF 500 SC 4050	UF 450 SC 4050	UF 400 SC 4050	UF 400 SC 4050	58 TO 61

TOTAL ARROW LENGTH

BOW DRAW WEIGHT

	23"	24"	25"	26"	27"	28"	29"	30"	31"	32"	33"
13-18 lbs.	MXR2000	MXR1800	MXR1500	MXR1300	NA1100 MXR1100	NA1000 MXR1000 MPR1000	NP900 NA900 MXR900 MPR900				
19-24 lbs.	MXR1500	MXR1300	NA1100 MXR1100	NA1000 MXR1000 MPR1000	NP900 NA900 MXR900 MPR900	NP800 NA830 MXR800 MPR800	NP750 NA730 MXR700 MPR710	NP700 NA680 MXR700 MPR710	NP650 NA630 MXR600 MPR650		
25-34 lbs.	MXR1300	MXR1100	NA1000 MXR1000 MPR1000	NP900 NA900 MXR900 MPR900	NP800 NA830 MXR800 MPR800	NP750 NA730 MXR700 MPR710	NP700 NA680 MXR700 MPR710	NP650 NA630 MXR600 MPR650	NP600 NA580 MXR600 MPR590		
35-39 lbs.	MXR1100	NA1000 MXR1000 MPR1000	NP900 NA900 MXR900 MPR900	NP800 NA830 MXR800 MPR800	NP750 NA730 MXR700 MPR710	NP700 NA680 MXR700 MPR710	NP650 NA630 MXR600 MPR650	NP600 NA580 MXR600 MPR590	NP550 NA530 MXR500 MPR530	NP500 NA490 MPR470	
40-45 lbs.	NA1000 MXR1000 MPR1000	NP900 NA900 MXR900 MPR900	NP800 NA830 MXR800 MPR800	NP750 NA730 MXR700 MPR710	NP700 NA680 MXR700 MPR710	NP650 NA630 MXR600 MPR650	NP600 NA580 MXR600 MPR590	NP550 NA530 MXR500 MPR530	NP500 NA490 MXR500 MPR470	NP450 NA450 MPR410	
46-51 lbs.	NP900 NA900 MXR900 MPR900	NP800 NA830 MXR800 MPR800	NP750 NA730 MXR700 MPR710	NP700 NA680 MXR700 MPR710	NP650 NA630 MXR600 MPR650	NP600 NA580 MXR600 MPR590	NP550 NA530 MXR500 MPR530	NP500 NA490 MXR500 MPR470	NP450 NA450 MPR410	NP400 NA410 MPR410	NP350
52-57 lbs.	NP800 NA830 MXR800 MPR800	NP750 NA730 MXR700 MPR710	NP700 NA680 MXR700 MPR710	NP650 NA630 MXR600 MPR650	NP600 NA580 MXR600 MPR650	NP550 NA530 MXR500 MPR530	NP500 NA490 MXR500 MPR470	NP450 NA450 MPR410	NP400 NA410 MPR410	NP350 NA380	
58-63 lbs.	NP750 NA730 MXR700 MPR710	NP700 NA680 MXR700 MPR710	NP650 NA630 MXR600 MPR650	NP600 NA580 MXR600 MPR590	NP550 NA530 MXR500 MPR530	NP500 NA490 MXR500 MPR470	NP450 NA450 MPR410	NP400 NA410 MPR410	NP350 NA380	NP350	
64-69 lbs.	NP700 NA680 MXR700 MPR710	NP650 NA630 MXR600 MPR650	NP600 NA580 MXR600 MPR590	NP550 NA530 MXR500 MPR530	NP500 NA490 MXR500 MPR470	NP450 NA450 MPR410	NP400 NA410 MPR410	NP350 NA380	NP350		
70-75 lbs.	NP650 NA630 MXR600 MPR650	NP600 NA580 MXR600 MPR590	NP550 NA530 MXR500 MPR530	NP500 NA490 MPR470	NP450 NA450 MPR410	NP400 NA410 MPR410	NP350 NA380	NP350			

LEGEND NA = Nano-XP™ NP = Nano-Pro™ MXR = Medallion™-XR MPR = Medallion™-Pro

*A heavier point may be required to achieve proper arrow flight.